


Curtain profile embedded in plaster with "maxi" channel, VS57 standard

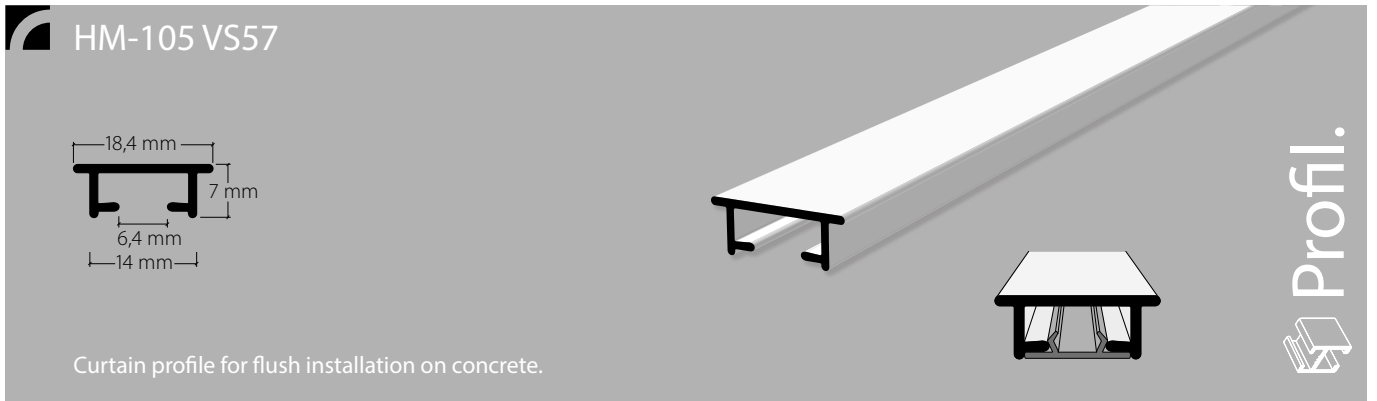

Aluminium, natural anodised


Aluminium, white, RAL 9016

Stock lengths of 4 m and 6 m


"maxi" accessories



Installation accessories with 1-channel bracket

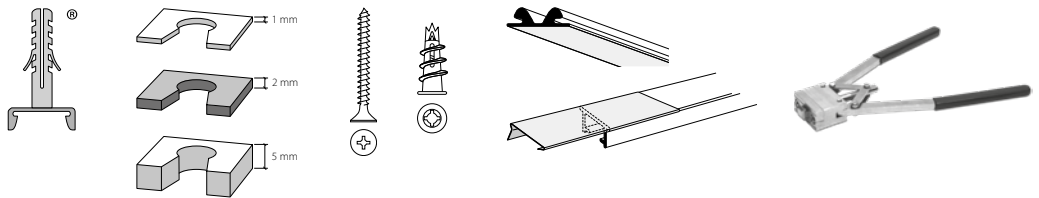

Installation accessories with 2-channel bracket

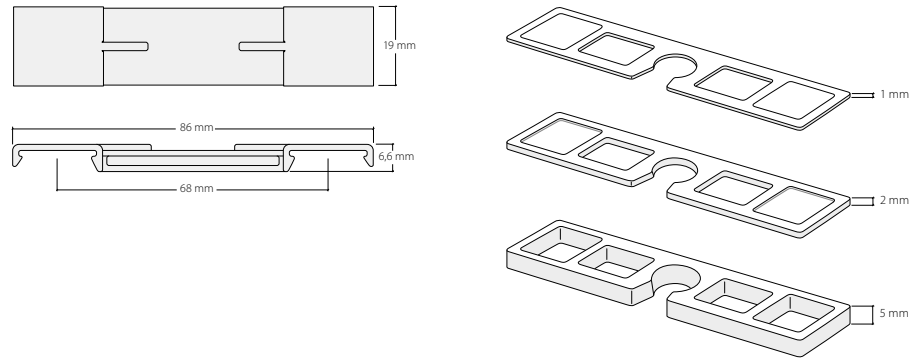

Services

Curved designs, made-to-measure including opening and cover strip inserted into the profile

Bending service

Plan view (seen from above). State room side.



Radii: from 80 mm
90° angle or angle of your choice



Non-standard radii and angles as per sketch

Installation instructions, see next page

Installation




The plaster protective strip always needs to be inserted **before** the profile is installed.




Caution: The opening for the gliders needs to be made before installation.

Installation on concrete





Click in diagonally

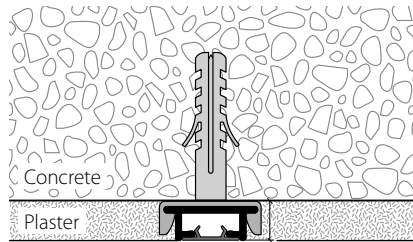




Recommendation:
Position a ceiling bracket every 30-40 cm.

Installation on suspended ceiling


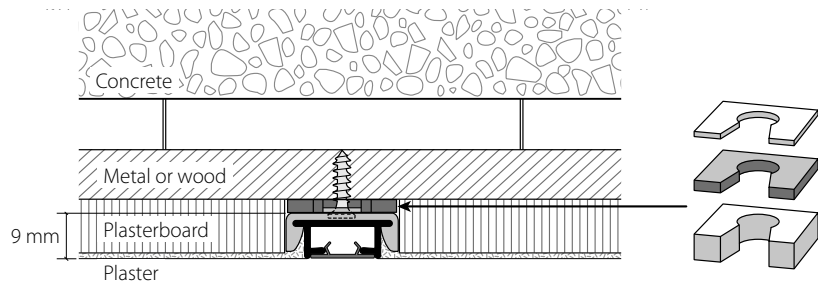








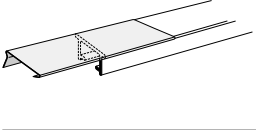

Installation with click-in dowel ceiling bracket on metal, wood, plasterboard, etc., suspended ceilings

Installation with 2-channel bracket

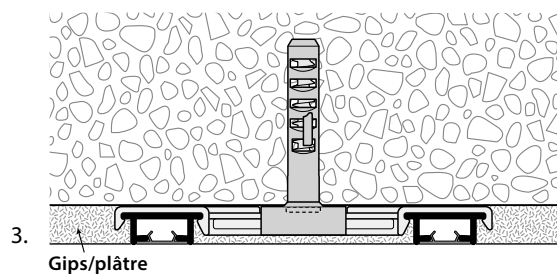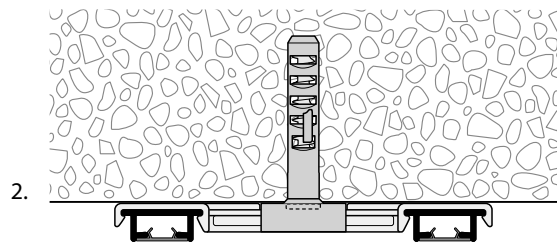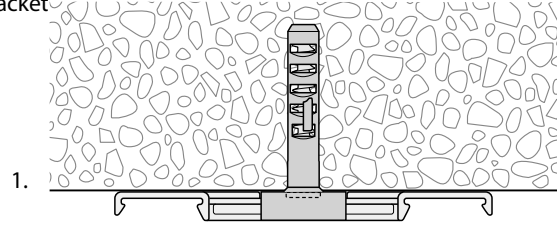


Levelled profile system fitted with washer.

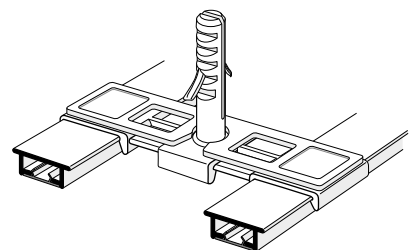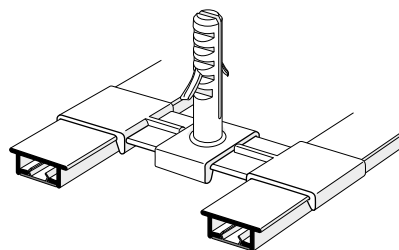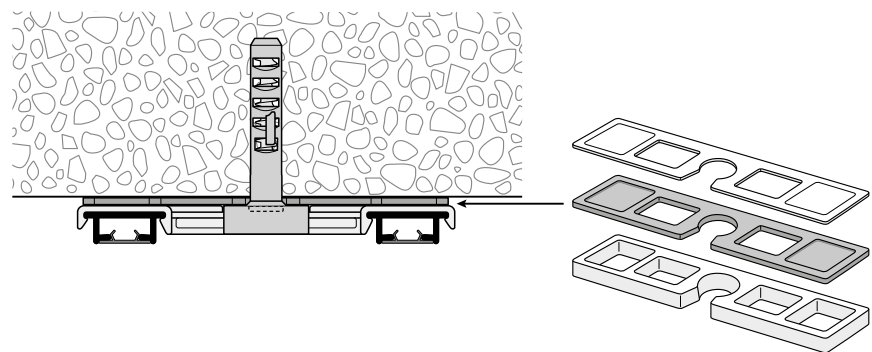

	Article description	Order no.
	<p>"maxi" curtain profile for embedding in plaster</p> <p>Aluminium, natural anodised</p>	<p>105.10</p>
	<p>Aluminium, white, RAL 9016</p>	<p>105.20</p>
	<p>Stock lengths of 4 m and 6 m</p>	<p>Made-to-measure + 20%</p>
	<p>"maxi" curtain profile for embedding in plaster with inserted plaster protection strip</p> <p>Aluminium, natural anodised</p>	<p>105.10.A</p>
	<p>Aluminium, white, RAL 9016</p>	<p>105.20.A</p>
	<p>Stock lengths of 4 m and 6 m</p>	<p>Made-to-measure + 20%</p>
	<p>Plaster protection strip, plastic, white</p> <p>60 m rolls</p>	<p>11055.20</p>
	<p>Profile connector V5, spring steel</p> <p>is fixed to the back of the profile</p>	<p>11003</p>
	<p>Ceiling bracket, plastic</p> <p>8 mm drill hole \varnothing for dowel \varnothing 8 mm, or screws 4.0/4.5 x ...</p>	<p>11050</p>

	Article description	Order no.
--	---------------------	-----------



"maxi" curtain profile for embedding in plaster
Rear of profile **unfinished**


Aluminium, white, RAL 9016

105.20.Blank



Stock lengths of 6 m

Made-to-measure + 20%



"maxi" curtain profile for embedding in plaster
rear of profile **unfinished**
with inserted plaster protection strip




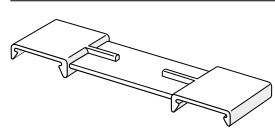
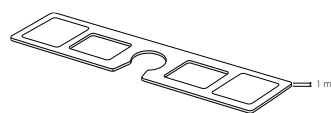
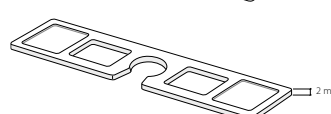
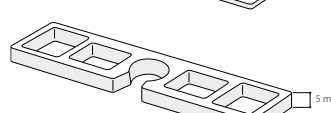
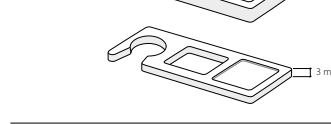



Aluminium, white, RAL 9016

105.20.A.Blank



Stock lengths of 6 m

Made-to-measure + 20%

	Article description	Order no.
	Plastic washers for ceiling bracket 11050 for levelling	
	Thickness 1 mm	11056
	Thickness 2 mm	11057
	Thickness 5 mm	11060
	2-channel adapter, plastic Ceiling bracket for the 2-channel installation of HM-105	11020
	Plastic washers for adapter 11020	
	Thickness 1 mm	11021
	Thickness 2 mm	11022
	Thickness 5 mm	11025
	Thickness 3 mm	11023
	Dry lining dowel 12 x 30 mm, plastic for installation on plasterboard	55981
Bending service	Plan view (seen from above). State room side.	
	Radii: from 80 to 200 mm	95105.1
	Radii: up to 500 mm	95105.2
	Radii: up to 1000 mm	95105.3
	90° angle or angle of your choice	
	Non-standard radii and angles as per sketch	95105.4